



SINCE 1979

# HEMINGSTONE

THE FIRST CHOICE

台灣峰明機械股份有限公司

HEMINGSTONE MACHINERY CO., LTD.

No. 41, Wu-Kong 5 Rd., Wu-Ku Industrial Park,  
Wu-Ku Dist., New Taipei City 248, Taiwan  
Tel: +886-2-2299-1616, 2299-5700  
Fax: +886-2-2299-2070, 2299-2080  
E-mail: hm.stone@msa.hinet.net  
hm\_mail@hemingstone.com  
[www.hemingstone.com](http://www.hemingstone.com)

## 2 Lines Bottom Sealing Machine for Bags On Rolls with Core for Star Sealing Bag , Vegetable Bag and Bottom Sealing with Side Gusset Bag (Optional: Folding unit with edge guider for star seal bag)



**High Speed HM-800HCB (Speed 300 pcs/min max.)**  
**HM-800CB (Speed 230 pcs/min max.)**

## Features

- High speed bottom sealing machine with perforation and paper core rewind.
- Fixed distance between sealing and perforation, no adjustments required.
- Fully automatic paper core changing system
- A, B lines are separately controlled to minimize wastage
- Tension control by air; no tension at the sealing point therefore enhances sealing strength and quality.
- HD, LD, LLD and recycled materials applicable.
- Can produce vegetable bag, star sealing bag and gusseted bottom sealing bag.

- Maquina de alta velocidad de sello de fondo con perforación y rebobinador con cono de papel.
- Distancia fija entre sellado y perforación, no requiere ajustes.
- Sistema de cambio automático del cono.
- Lineas A, B son controladas separadamente para minimizar desperdicios.
- Control de tensión por aire; sin tensión en el punto de sellado para fortalecer la calidad y fuerza de sellado.
- Compatible con material HD,LD,LLD y reciclado.
- Produce bolsa para vegetal, bolsa sellado estrella y bolsa sello fondo con fuelles.

- ماكينة اللحام السفلى عالية السرعة مع سكين التخريم ووحدة اللف للكور الورقية،  
المسافة بين خط اللحام و سكين التخريم مثبتة، ولا تحتاج الى ضبط.

- نظام تغيير الكور الورقية اوتوماتيكي بالكامل .


- التحكم المنفصل و الذاتي لكل خط و ذلك لتقليل التالف .

- التحكم في الجهد بالهواء، حيث لا يوجد جهد عند نقطة اللحام و ذلك لتعزيز قوة و جودة اللحام.

- كافة الخامات، HD, LD, LLD و المواد المعاد تدويرها قابلة للاستخدام .

- تتخصص الماكينة لانتاج كيس الخضروات، لحام شكل النجمة، اكياس لحام سفلى مع عصفه جانبية

### With Core

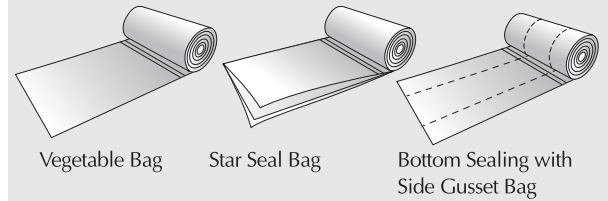

	Bag Size		Thickness for vegetable bag & bottom sealing with gusset bag (min.-max.) mm	Thickness for star sealing bag (min.-max.) mm	Speed (pcs/min)	Line Speed (m/min)	Speed for Changing the Roll (times/max.)	Production of Rolls		Power Required (kw)	Machine Dimensions			Air Compressor (not included) (hp)
	Width (mm)	Length (mm)						Roll Width (mm)	Roll dia. (mm/max.)		L (m)	W (m)	H (m)	
HM-800HCB	110~350 x 2 lines	150~1000	0.02~0.15	0.02~0.12	300	135	4	110~350 x 2 lines	200	7	7.6	2.17	2	5
HM-800CB	110~350 x 2 lines	150~1000	0.02~0.15	0.02~0.12	230	100	4	110~350 x 2 lines	200	7	7.6	2.17	2	5



SINCE 1979

# HEMINGSTONE

THE FIRST CHOICE

台灣峰明機械股份有限公司  
HEMINGSTONE MACHINERY CO., LTD.

台灣248新北市五股工業區五工五路41號

電話: +886-2-2299-1616, 2299-5700

傳真: +886-2-2299-2070, 2299-2080

E-mail: hm.stone@msa.hinet.net

hm\_mail@hemingstone.com

www.hemingstone.com



## 雙線底封式八摺袋

## 蔬菜連卷袋制袋機 (含紙芯)

(選購配備:八角袋對折設備)



高速 HM-800HCB (最快速度 每分鐘 300 下)


HM-800CB (最快速度 每分鐘 230 下)

### 機械特性


- 雙通道、雙伺服、雙電眼  
最快速度: 每分鐘230下  
線速度: 每分鐘100米
- 含紙芯卷取專用, 全自動換卷
- A、B線獨立計數控制、獨立換卷
- 封線到點斷線距離恒定, 不因速度變化而改變
- 採吹風式張力, 無拉力封口, 封線牢固
- 可製作蔬菜袋、帶有邊摺的底封袋與八摺袋

#### 含紙芯


蔬菜袋



八摺袋



有邊摺的  
底封袋



型號	制袋尺寸		蔬菜袋與邊摺 底封袋總厚度 (範圍) 毫米	八摺袋 總厚度 (範圍) 毫米	速度 (個/分鐘)	線 速度 (米/分鐘)	最大換 卷速度 (次/分鐘)	成品規格		電力 需求 (千瓦)	機械尺寸			空壓需求 (客戶自備) (馬力)
	寬 (毫米)	長 (毫米)						成品卷寬 (毫米)	成品卷直徑 (毫米/最大)		長 (米)	寬 (米)	高 (米)	
HM-800HCB	110~350 x 2 線	150~1000	0.02~0.15	0.02~0.12	300	135	4	110~350 x 2 線	200	7	7.6	2.17	2	5
HM-800CB	110~350 x 2 線	150~1000	0.02~0.15	0.02~0.12	230	100	4	110~350 x 2 線	200	7	7.6	2.17	2	5

※ 本公司產品全部台灣生產製造 秉持求新求好之精神, 不斷改善及研發新功能, 並保有本型錄之規格異動權利, 若有變動恕不另行通知。